




CARBON CARTRIDGES: CHEMICAL/PLATING

CARBONEX - P: 3 in 1 GRANULAR CARBON FILTER

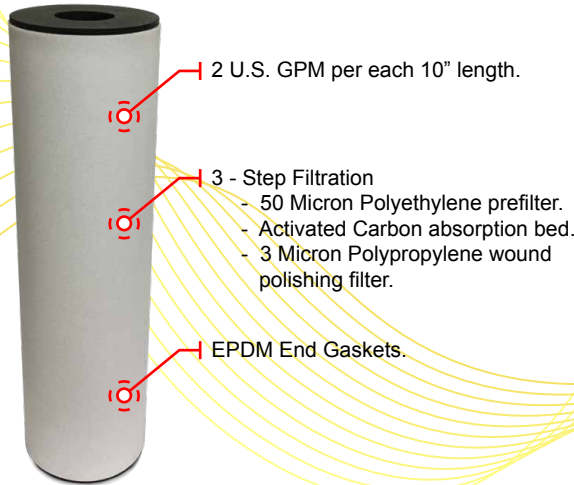

MODEL	WEIGHT	LENGTH	DIA	QTY PER CARTON
CU10P	7 oz.	10"	2-3/4"	25
CU20P	14 oz.	20"	2-3/4"	12
CU30P	21 oz.	30"	2-3/4"	12

Maximum operating temperature: 150°F (66°C)

CARBO-FYNE - P: POWDERED CARBON FILTER



MODEL	WEIGHT	LENGTH	DIA	QTY PER CARTON
C4P	1.6 oz.	4"	2-3/4"	60
C6P	2.4 oz.	6"	2-3/4"	30
C9.8P	4 oz.	9.75"	2-3/4"	30
C10P	4 oz.	10"	2-3/4"	30
C20P	8 oz.	20"	2-3/4"	30
C30P	12 oz.	30"	2-3/4"	30

Maximum operation temperature: 150°F (66°C)


CARBO-FYNE - PE: POWDERED CARBON FILTER FOR ELECTRONICS



MODEL	WEIGHT	LENGTH	DIA.	QTY PER CARTON
C10PE	6 oz.	10"	2-3/4"	30
C20PE	12 oz.	20"	2-3/4"	30

Maximum operating temperature: 150°F (66°C)

CARBO-WIND - P: 3 in 1 GRANULAR CARBON FILTER

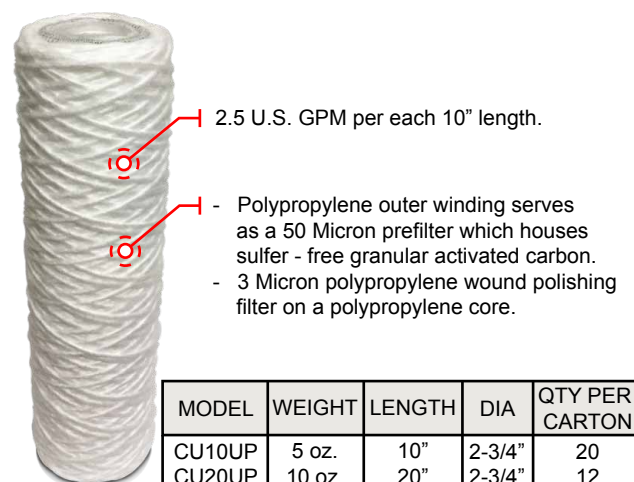

MODEL	WEIGHT	LENGTH	DIA	QTY PER CARTON
CU10UP	5 oz.	10"	2-3/4"	20
CU20UP	10 oz.	20"	2-3/4"	12
CU30UP	15 oz.	30"	2-3/4"	12

MODEL	WEIGHT	LENGTH	DIA	QTY PER CARTON
CUR10UP	3 oz.	10"	2-1/2"	20
CUR20UP	6 oz.	20"	2-1/2"	12
CUR30UP	9 oz.	30"	2-1/2"	12

Maximum operating temperature: 200°F (93°C)



CARBON CARTRIDGES: CHEMICAL/PLATING

MAXI-CARB - PE: POWDERED CARBON FILTER



- Constructed like Carbo-Fyne PE except oversized for maximum carbon capacity.
- Serves as an effective sediment removal filter down to the 1 - 2 micron range.
- Non-Metallic, polyethylene end caps w/ rubber gaskets, polyolefin blue net, and polypropylene core.
- Cartridge contains high purity, pre-washed, and sulfur-free pulverized activated carbon.
- 3 U.S. GPM flow rate.

MODEL	WEIGHT	LENGTH	DIA.	FLOW (GPM)	QTY PER CARTON
C528PE	48 oz.	28"	5"	3 - 5	6

Maximum operating temperature: 150°F (66°C)

MINI-CANISTER - P: ABS/PVC/SARAN® CANISTER - FOR GRANULAR CARBON



- Twist - off end cap to allow easy filling with carbon or resin.*
- Used to remove organic substances which cause taste, odor, and color in water.
- 2 U.S. GPM per each 10" length.
- Saran end cap screen retains contents.

Designed to fit SERFILCO GPO and GSO chambers. See Bulletin C-101

GRANULAR ACTIVATED CARBON			MODEL	3" DIA. x LENGTH	WEIGHT OF CARB.
COCONUT SHELL BASED Steam activated for high absorption capacity					
12 x 30 MESH STANDARD	LBS	PCN	4ABS	4"	3 oz.
	10	99-0997-10	6ABS	6"	7 oz.
	50	99-0997-50	10ABS	10"	14 oz.
			20ABS	20"	33 oz.
			30ABS	30"	52 oz.
			40ABS	40"	71 oz.

To order resin, refer to bulletin R-208