




## PLEATED FILTER CARTRIDGES

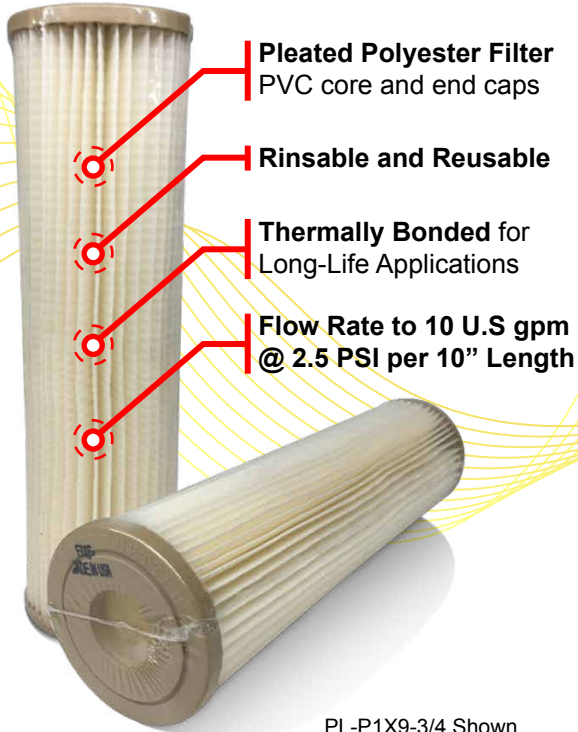

**Pleated Polyester Filter**  
PVC core and end caps

**Rinsable and Reusable**

**Thermally Bonded for**  
Long-Life Applications

**Flow Rate to 10 U.S gpm**  
@ 2.5 PSI per 10" Length

PL-P1X9-3/4 Shown.


### POLYESTER FILTER CARTRIDGES

MODEL	LENGTH	AREA	
		FT <sup>2</sup>	M <sup>2</sup>
PL-P*x9-3/4	9-3/4"	4	.37
PL-P*x19-1/2	19-1/2"	8	.74
PL-P*x29-1/4	29-1/4"	12	1.1

\* Insert micron size desired - 1, 5, 20, or 50.

END CAP COLOR CODE	
COLOR	MICRON
TAN	1
WHITE	5
BLUE	20
YELLOW	50

24 Cartridges per case  
Minimum Order: 6 Cartridges

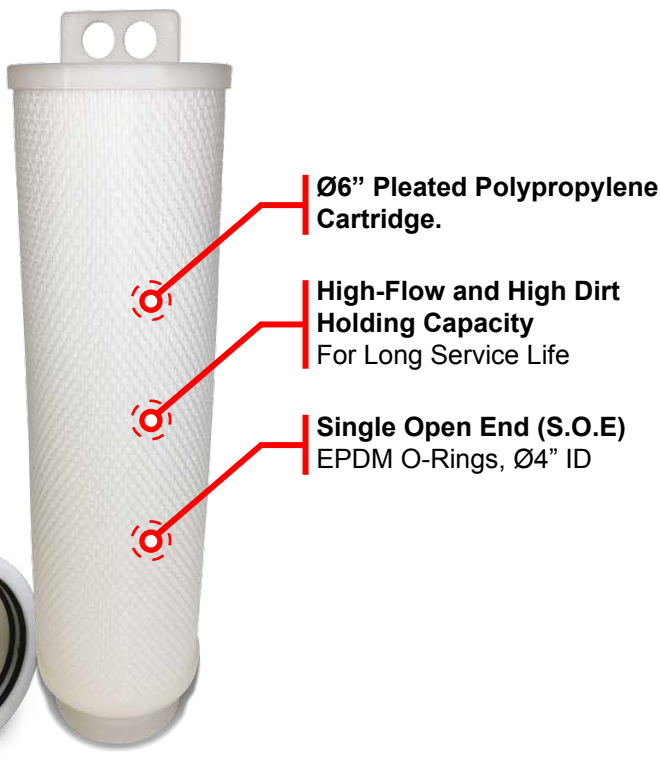

**Ø6" Pleated Polypropylene**  
Cartridge.

**High-Flow and High Dirt**  
**Holding Capacity**  
For Long Service Life

**Single Open End (S.O.E)**  
EPDM O-Rings, Ø4" ID

### 'HM' SYSTEM REPLACEMENT FILTER CARTRIDGES

Hi-Flow Ø6" Pleated Cartridge, PP/EPDM		
CODE	MICRON	LENGTH
SF-PL-PF01U20U	1µ	20"
SF-PL-PF05U20U	5µ	
SF-PL-PF10U20U	10µ	



## HIGH-FLOW Ø6” PLEATED FILTER



**Ø6” Pleated Polypropylene Filter**  
PP core and outer shell.

**Pleated Bag Style Filter**  
Fluid Flows from the top-down.

**High-Flow and High Dirt Holding Capacity**  
For Long Service Life

SF-PL-PHFU1U40U (40”) Shown

### PLB-HE REPLACEMENT FILTER CARTRIDGES

MICRON RATING	20” LENGTH FILTER	40” LENGTH FILTER
1µ	SF-PL-PHFU1U20U	SF-PL-PHFU1U40U
5µ	SF-PL-PHFU5U20U	SF-PL-PHFU5U40U
10µ	SF-PL-PHFU10U20U	SF-PL-PHFU10U40U
20µ	SF-PL-PHFU20U20U	SF-PL-PHFU20U40U
For FKM Elastomers, add '-V' to PCN		

## SOE Ø6” PLEATED FILTER WITH 2-1/8” DOUBLE O-RING PLUG-IN CONNECTION

**COMING SOON!**